

GEHL

GCT TELEHANDLERS



GEHL
WORKS LIKE YOU™

SAFETY + COMFORT

The GEHL GCT Compact Telehandler has been designed to save you time and money. Suitable for many environments, whether for landscaping sites, equestrian centers, renovation works, etc. With a capacity of 1.25 ton or 1.5 ton, the GCT can easily move pallets of concrete blocks or bricks, bundles of straw or hay. Its ultra-compact dimensions and ground clearance of 29cm make it an ideal choice for

moving around in cramped spaces and off-road. Thanks to its light weight, the machine can easily be transported on a small trailer (GVWR 3500 kg). Finally, the many options available, the multitude of accessories and the tires of different profiles allow you to adapt your machine to the environment it operates in. GEHL is committed to designing machines that ensure optimum safety for users.



EASY ACCESS CABIN

Easily access the cab through a large opening door without a step.

SAFETY PACK OPTION

A device which accompanies and protects the operator while informing them in real time of a potential risky maneuver. It simultaneously warns people in the vicinity via an external warning light and sends the information to the fleet manager. A simple tool to acquire the right reflexes and promote safe operating behavior!

ORANGE BELT

Visible waistband for added safety to the operator in his working environment (standard or optional depend on seat).

ACCESSORY TILT LOCK

A button in the cabin is used to lock the "tilting movement" function. You can work with peace of mind.

AUTOMATIC PARKING BRAKE

Each time the machine stops, the parking brake is directly engaged, for more security.

BATTERY SWITCH

This system manually shuts off the electrical circuit of the machine.



GET THE JOB DONE IN A GEHL

JOYSTICK ON FLOATING ARMREST

Control safety without fatigue, with all one-handed movements. You always keep one hand on the steering wheel for total control of your machine.



DRIVING ASSISTANCE

A set of pop-ups inform the operator in real time about the use of a machine.



OPTIMAL VISIBILITY

Benefit from an unobstructed view of the load, in the high position. The roof window is made of polycarbonate, a transparent and very resistant material to meet the FOPS standard (protection against falling objects). The hoses are well protected on the inside of the boom to release the visibility on the right side.



A FULL RANGE OF OPTIONS

- Low Frequency Air Suspension
- Cloth-Covered Seat
- Air Conditioning
- Car Radio
- Phone Support
- Sun Visor
- Adjustable Steering Column
- Floor Mat
- Full Road Lighting
- Flat LED Rotating Beacon
- LED Work Lights on Cab (x4)
- LED Work Lights on Boom Head (x2)
- Material Baffle on Boom Head
- Air Pre-Filter
- Auto Reversing Fan
- Rear Mudguards
- Rear Electric Plug
- Attachment Hydraulic Line + Easy Connect System
- Continuous Flow Hydraulics
- Stop & Start
- Attachment Hydraulic Locking
- SafeView Camera Pack (x2)
- Windscreen Protection Grid
- 3 types of Attachment Carriages (4-points, Skid Steer or Euro Attachment Carriage)
- Full Range of Tires with Different Profiles and Dimensions

THE FULL LIST OF OPTIONS IS AVAILABLE UPON REQUEST. PLEASE CONTACT YOUR GEHL DEALER FOR FURTHER INFORMATION.

REDUCED TRANSPORT COST

LIGHTWEIGHT

Transportable machine on a trailer with a GVWR* of 3.5 tonnes

*Gross Vehicle Weight Rating

SAFETY

Well-identified tie-down points are accessible in front and rear of the machine

FOLDING FORKS

The floating fork carriage allows the forks to be fastened to the carriage to gain length while facilitating secure transport on trailers.

4.30 M

MAXIMUM LIFTING HEIGHT

1.25 T OR 1.5 T

2 MODELS TO CHOOSE FROM


3 STEERING MODES



2-WHEEL



4-WHEEL



CRAB

35.1 hp (26.2 kW) Engine

Meeting the Stage V environmental standard, exhaust gas treatment is carried out using a DOC (Diesel Oxidation Catalyst) and a particulate filter.

Inching Function

This feature allows you to speed up movements of the boom while limiting the forward speed of the machine. It's incredibly helpful for stacking bales or placing pallets at maximum height.

Simultaneous Boom Movements

The flow sharing distributor enhances simultaneous movements for efficient work. You choose to do one or several movements at the same time for more precision.

COMPACT DIMENSIONS

3.47m

LENGTH

1.49m

WIDTH

1.92m

HEIGHT





Electronic Carriage Compensation System

Automatic fork leveling. We've improved visibility at the rear of the machine by removing the cylinder. This also reduces the machine weight, optimizing fuel consumption.

Hydrostatic Transmission

Choose your speed with a simple gesture. The hydrostatic transmission guarantees smooth handling without jerks. Perfect in cramped spaces and saves you time!

Limited Slip Differentials on Front and Rear Axles

The machine is perfectly adapted to muddy grounds.



COMPACTNESS AND MANEUVERABILITY

With a width of 1.49m and a height 1.92m, the machine moves with ease in the tightest spaces: urban or congested sites, entrances garages, stalls, etc. The small turning radius and 4-wheel steering make maneuvering easier.



ALL TERRAIN

Its ground clearance of 29cm allows the GCT to easily overcome all obstacles. The oscillating rear axle guarantees maximum stability. The machine is equipped with 4-wheel drive standard and fenders at the front of the machine.

FULL SUPPORT

 ATTACHMENTS

 PARTS

 FINANCE

Manitou Group is here to help support and service the machines you love. From Financing, Warranties, Maintenance and more, we are dedicated to support the end customer. Whether you're in agriculture or construction, Manitou Group provides machines, attachments and services adapted to your daily needs. Our goal is to make your life easier! See what you can accomplish with your new GEHL and keep your peace of mind with Manitou Group services and solutions.

REDUCE YOUR TCO

REDUCE YOUR FUEL CONSUMPTION

The Stop & Start option reduces fuel consumption, CO² emissions, the number of recorded engine hours and noise pollution by automatically stopping the engine when the machine is stationary. Engine restart is automated without turning the key.

-25% HYDRAULIC OIL

The hydraulic oil tank is equipped with an anti-aeration filter. It reduces the volume of hydraulic oil required by 25%.

FAST + SIMPLIFIED MAINTENANCE

- Service intervals and error codes are displayed on the dashboard screen.
- The large opening engine bonnet on the side of the machine allows easy access to the main components.
- The fuel and hydraulic oil tanks are easily accessible and clearly identified.
- A hatch at the front of the radiators makes it possible to remove the straw and dust in front of the radiators.
- The battery is easily accessible, just under the cab.



THE NEW MY GEHL APP IS AVAILABLE FOR
DOWNLOAD FROM THE APP STORE OR ON
GOOGLE PLAY STORE.

TAKE THE POWER OF YOUR MACHINE INTO
YOUR HANDS TODAY!








SPECIFICATIONS

| | GCT 3-14 | GCT 3-14+ | |
|-------------------|-----------------------------------|-------------|---------|
| DIMENSIONS | Maximum Capacity | 1250 kg | 1500 kg |
| | Maximum Lifting Height | 4.3 m | 4.3 m |
| | Maximum Forward Reach | 2.62 m | 2.62 m |
| | Minimum Shipping Mass | 2550 kg | 2700 kg |
| | Maximum Shipping Mass | 2750 kg | 2900 kg |
| | Overall Length without Attachment | 3.47 m | 3.47 m |
| | Height to Top of Cab | 1.92 m | 1.92 m |
| | Overall Width - Less Bucket | 1.49 m | 1.49 m |
| | Outer Turning Radius | 2.62 m | 2.62 m |
| ENGINE | Engine Manufacturer | Yanmar | |
| | Engine Standard | Stage V | |
| | Engine Power | 26.2 kW | 26.2 kW |
| | Transmission Type | Hydrostatic | |
| | Travel Speed | 25 kph | 25 kph |

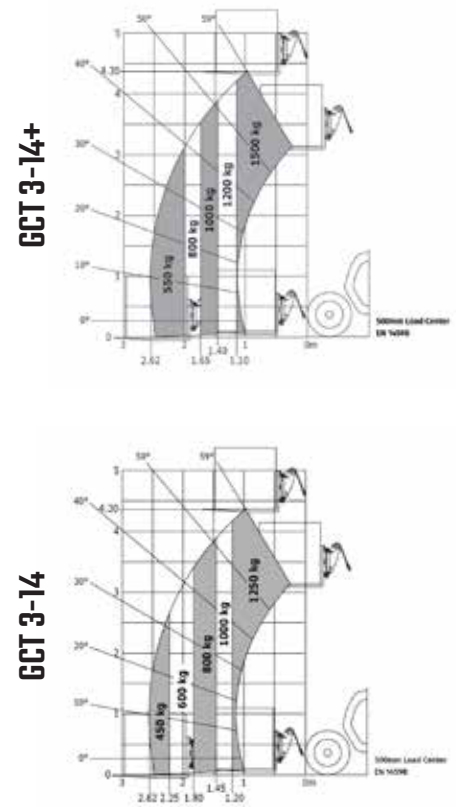

A MULTIFUNCTION MACHINE

attachments for all of your needs

Thanks to the large choice of accessories designed and validated by the Manitou Group, your GCT can easily be transformed into tool carriers for placing or stacking loads, clearing snow, sweeping your site, or loading bulk materials.

LIGHT MATERIAL BUCKET



Designed for bulk material with a density maximum of 800kg/m³, this bucket allows high loading productivity thanks to its capacity of 770 liters.

GENERAL PURPOSE BUCKETS



Dedicated to construction applications for moving bulk material of 2100 kg/m³ maximum density with a 400 liter capacity.

GRAPPLE BUCKET



Multifunctional and efficient, it allows you to load and unload bulk material of 1000 kg/m³ maximum density with a capacity of 600 liters.

SNOW BLADE



Easy to use and solid, it is designed to withstand all winters by effectively clearing snow in a single passage.

WRAPPED BALE CLAMP



Qualitative and easy to use, this clamp is made for transport and storage of wrapped bales. The smooth arm structure avoids any perforation of the film.

MANURE FORK



Robust and versatile solution for dredging and moving bulky manure or haystacks. The opening of the grapple at 90° makes it possible to work close to the walls.

GEHL®

WORKS LIKE YOU™

GEHL.COM



Manitou Americas, Inc.

P.O. Box 179

One Gehl Way

West Bend, WI, USA 53095

P: (262) 334-9461

F: (262) 338-7517

Manitou Group reminds users to read and understand the operator's manual before operating any equipment. Also, make sure all safety devices and shields are in place and functioning properly. Manitou Group reserves the right to add improvements or make changes in specifications at any time without notice or obligation.

© 2023 Manitou Equipment America, LLC. All registered and unregistered marks are owned by Manitou Equipment America, LLC or its affiliates. All rights reserved.

® denotes registration in the United States. Trademarks may or may not be registered in other countries.

brochure_document_telescopic_handler_gct_700761_b_met_gehl_en_us