


PG

Motor Pumps

**Powerful and fast dewatering action.**

The self-priming high-performance pumps of the PG series are designed to handle the removal of water with relatively small solids (\varnothing up to 6.5 mm). The self-priming mechanism and compact size make it an ideal pump for short-term use to remove smaller amounts of water. The cast iron impeller is easy to set up and adjust. It ensures a long service life and makes servicing easy.

- Mechanical carbon fiber reinforced ceramic seals
- Reliable four-cycle engine with low oil shutdown
- High-strength lightweight die cast aluminium casing
- Sturdy protective frame with comfortable carrying handles

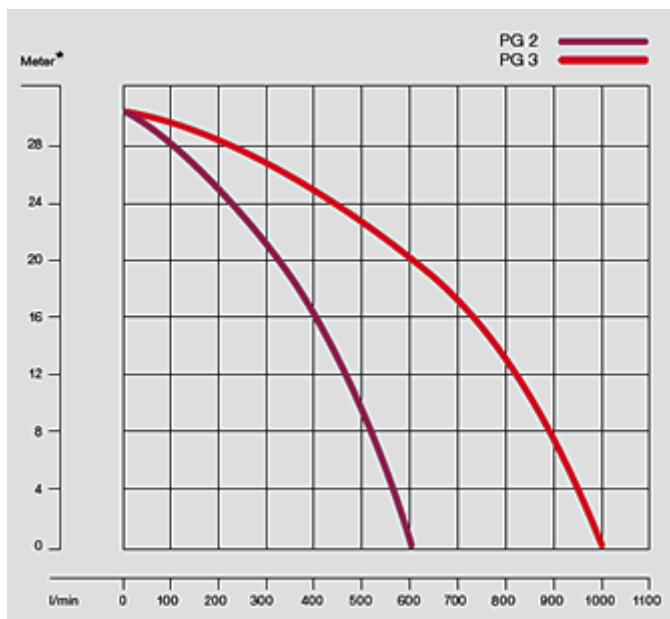

Operation at 3,000 1/min.

* total discharge head



Technical specifications

	PG 2	PG 3
Operating data		
Diameter (suction and discharge) mm	50	75
L x W x H mm	480 x 375 x 395	515 x 405 x 460
Operating weight kg	24	31
Total head m	30	30
Discharge capacity max. l/min	600	1,000
Suction height max. m	7.5	7.5
Solids diameter max. mm	6.5	6.5
Engine / Motor		
Engine / Motor type	Air-cooled single-cylinder four-cycle gasoline engine	Air-cooled single-cylinder four-cycle gasoline engine
Engine / Motor manufacturer	Honda	Honda
Engine / Motor	GX 120	GX 160
Engine performance (DIN ISO 3046) kW	3.5	4.8
at rpm rpm	3,600	3,600
Fuel consumption max. l/h	1.3	1.8
Displacement cm ³	118	163
Tank capacity (fuel) l	2.5	3.6

Please note

that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions.

Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2015 Wacker Neuson SE.